

# Upmatic® 2000IET

english




**Upmatic 2000IET =fully automatic filling and sealing machine for polyethylene bags ranging from 0,5 kgs to 10 kgs filled weight. Suitable for all bulk and granular products of the food and non-food industries.**

The Upmatic 2000 IET is extremely rugged and very easy to operate. It can handle with ease all standard widths and thicknesses of sheeting, either as pre-made bags or from the roll as a sleeve. The top and bottom sheet transporters are steplessly adjustable to each other. The pneumatic braking system guarantees exact repetition with dependable closing of the bags.

The Upmatic 2000 IET is mounted on casters. One of the two casters is lockable. Combination with all common weighing and dosing equipment is possible.

In our customers' interest, we reserve the right to introduce technical changes.

# Upmatic® 2000IET

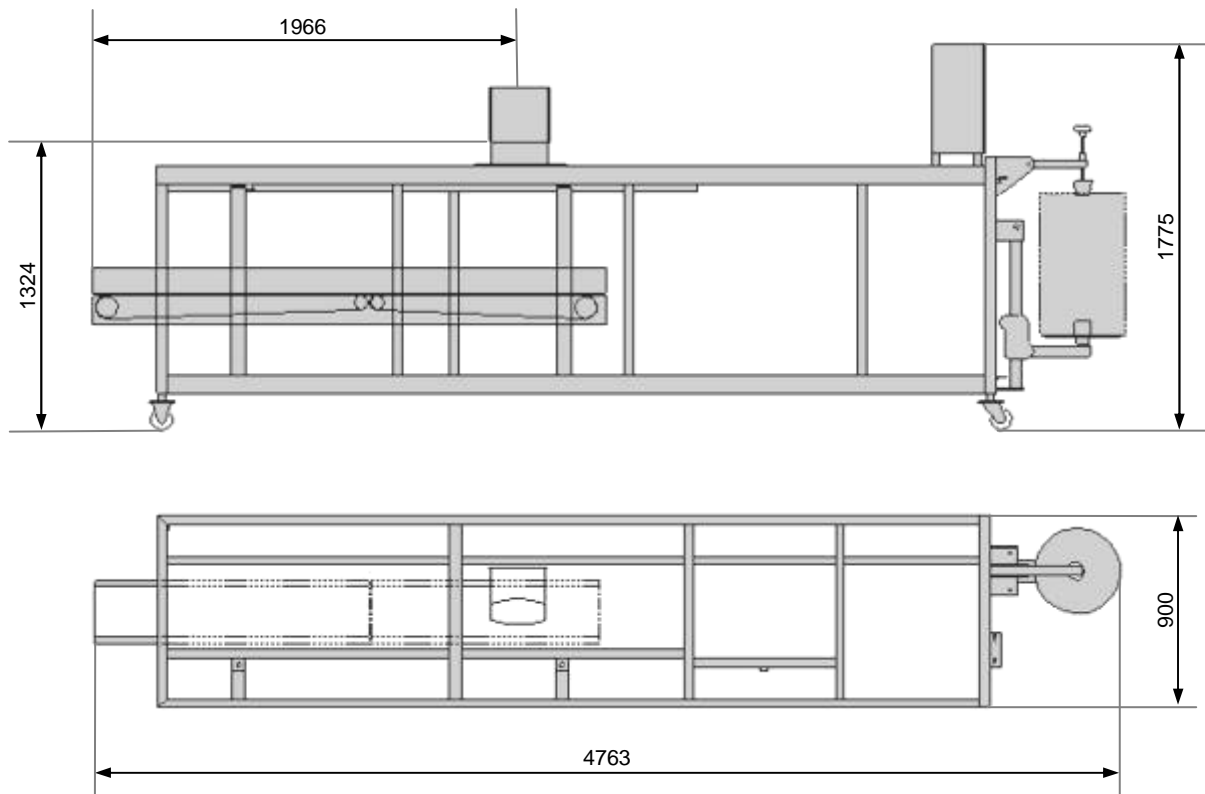

## Model:

**Upmatic 2000IET:** machine completely in stainless steel  
See illustration and explanatory text.

## Technical data:

- sealing station adjustable
- horizontal cutter / sealing station
- height adjustment for horizontal cutter / sealing station
- completely security doors and switches
- sheeting roll receiver height adjustable
- belt height adjustable, speed infinitely variable
- belt width: 200 mm up to 450 mm
- capacity: bags 1,5 kg approx. 30 cycles/min.  
bags 2,5 kg approx. 30 cycles/min.  
bags 5 kg approx. 28 cycles/min.  
bags 10 kg approx. 25 cycles/min.
- Supply voltage: 230/400 V, 50 Hz
- Power consumption: 2,1 kW
- Air pressure: 6 bar
- Air consumption: 2,3 l/cycle
- weight: 500 kgs

## Accessories:

- several marking equipment
- VTS vertical sealing unit with or without hole punching (for poly bags from sleeve)
- tearing device
- carrier bag press
- fully-automatic clipper
- fully-automatic ultrasonic closing system
- fully-automatic tape closing system
- VTS vertical sealing unit with cold perforation for half tube film and thermic cutting
- height adjustable for horizontal knife / sealing unit
- vibrating hopper with electronic filling control
- bag separation at horizontal sealing unit with divided and adjustable belt



## VERPACKUNGSMASCHINEN

Burgsteinfurter Damm 185 · D-48432 Rheine-Mesum  
phone +49 59 75 / 92 81-0 · fax +49 59 75 / 92 81-10  
Internet [www.upmann.de](http://www.upmann.de) · e-mail [info@upmann.de](mailto:info@upmann.de)